



S-DT2DKT TWO SPEED SWITCH Y/YY

Item no. 2698

Document type: **Product card**
 Document date: **2019-06-24**
 Generated by: **Systemair Online Catalogue**

Description

Switching and protecting unit; Dahlander Y/YY

For changing speed of three phase motors with 2 speed. Automatic cut out of motor when thermal contact trip (overheating of motor). Reset by setting the main switch to 0 and restart.


Plastic casing for surface mounting, assembly without casing is possible on a mounting rail.



Technical parameters

Voltage	400 V
Phase	3 ~
Max. load	4 kW
Connection	Y/YY
Enclosure class	54
Width	166 mm
Height	230 mm
Depth	129 mm

Wiring

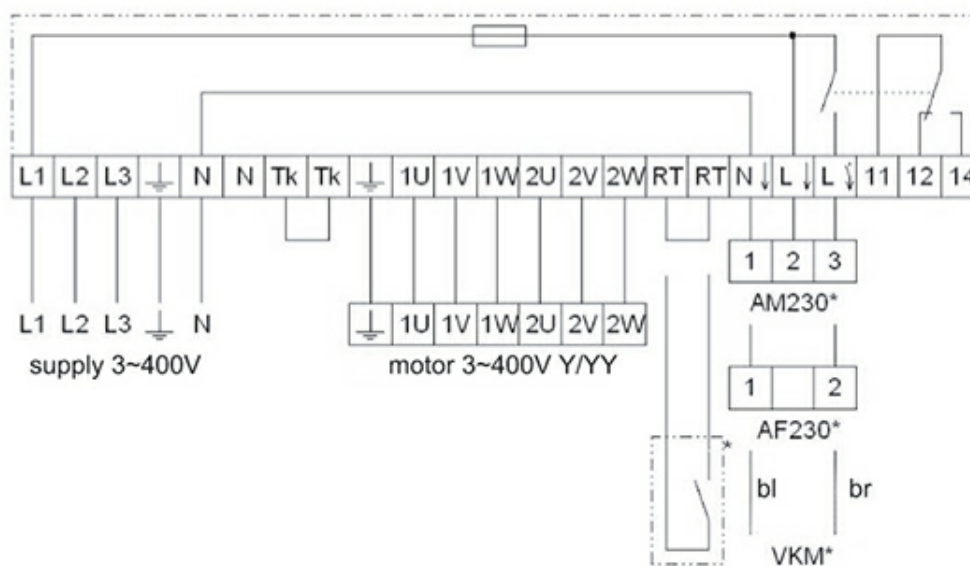

Documentation

S-DT2-bal051.pdf (1,03MB)

Get In Touch

Call: [0845 6880112](tel:08456880112)
 Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
 Settle, North Yorkshire, BD24 9RH



Specification text

Two speed switch with led out thermal contact for changing speed of three phase motors.
Automatic cut out of motor when thermal contact trips (motor overheating).
Reset by setting the main switch to 0 and restart.
Automatic restart after power failure.
Connection for room sensor and damper.
Plastic casing for wall mounting.

Voltage/input: 400V/3Ph
Max. power: 4.0 kW
Step switch: Y/YY
Switching mode: Dahlander
Protection class, surface mount housing: IP54
Dim. (WxHxD): 166x230x129 mm

Get In Touch



Call: [0845 6880112](tel:08456880112)



Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH