



S-DT2SKT TWO SPEED SWITCH Y/D

Item no. 2697

Document type: **Product card**
 Document date: **2019-06-24**
 Generated by: **Systemair Online Catalogue**

Description

Switching and protecting unit star/triangle

For changing speed of three phase motors with 2 speed by star/triangle switching. Automatic cut out of motor when thermal contact trip (overheating of motor). Reset by setting the main switch to 0 and restart.


Plastic casing for surface mounting, assembly without casing is possible on a mounting rail.



Technical parameters

Voltage	400 V
Phase	3 ~
Max. load	4 kW
Connection	Y/D
Enclosure class	54
Width	166 mm
Height	230 mm
Depth	129 mm

Wiring

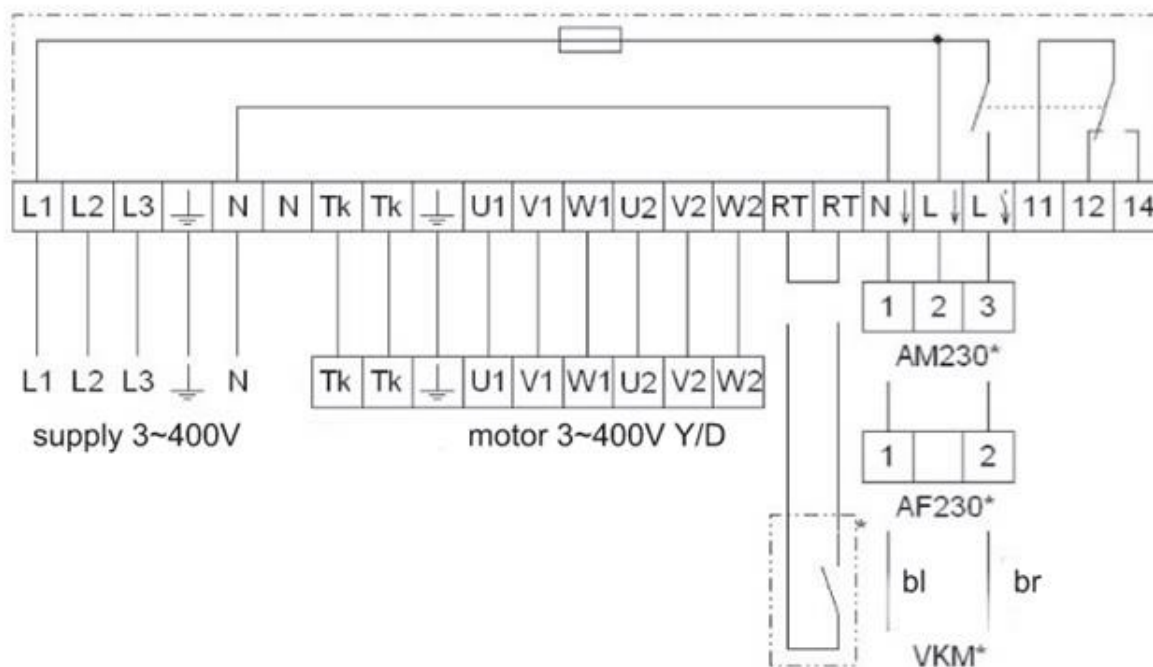


Get In Touch

Call: [0845 6880112](tel:08456880112)
 Email: info@adremit.co.uk



Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
 Settle, North Yorkshire, BD24 9RH

Documentation

 S-DT2-bal051.pdf (1,03MB)

Get In Touch

 Call: [0845 6880112](tel:08456880112)
 Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH