



SAVE Air Handling Units

Crisp, fresh, and clean air for every home.

[Find more details in our online catalogue](#)

Unlock even greater efficiency

SAVE AHUs come with different heating and cooling recovery methods. Allowing you to further boost the energy efficiency of your units, wherever they're installed.

Performance you can rely on

Our heat exchanger systems automatically regulates the heat/cool recovery and has automatic defrosting functions. Your SAVE AHUs will keep you comfortable inside, no matter the weather on the outside.

For buildings big and small

Whether you're building a new home or renovating an apartment block, SAVE air handling units are a perfect match for any indoor spaces up to 550m².

Health and safety first

SAVE air handling units are Eurovent certified and ErP compliant, easy to service and maintain. So you can relax – knowing the air you breathe is clean and pure.

Full control, from anywhere

All SAVE units come with SAVE Control – multiple, easy-to-use interfaces that let you communicate with your AHUs wherever you are.

Get In Touch

Call: [0845 6880112](tel:08456880112)
 Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard, Settle, North Yorkshire, BD24 9RH





Certifications



Eurovent Certified Performance

Get In Touch

Call: [0845 6880112](tel:08456880112)
 Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH






Technical parameters

Unit	
Frequency	50; 60 Hz
Voltage (nominal)	230 V
Phases	1~
Recommended fuse	10 A
Enclosure class	IP24
Speed regulation	Stepless
Product type	Heat recovery unit
Temperature	-20 to 40 °C
Preheater / Reheater	
Input power, reheater	0.5 kW
Supply fan	
Input power (P1), supply fan	86 W
Supply air filter	
Filter class, supply air	ePM1 60%
Extract air filter	
Filter class, extract air	ePM10 50%
Exchanger	
Heat exchanger rotor drive type	Variable speed
Heat exchanger	Rotating
Return fan / Extract fan	
Input power (P1), extract fan	86 W
Others	
Fan control	Stepless voltage control
Installation type	Vertical
Supply side	Left
Color casing	
Color casing	Stainless steel

Article name: SAVE VTR 150/K L 500W S.S | Product link: <https://shop.systemair.com/en-GB/productPermalink?p=609883> | Item Number: 488817 | Variant: Pleated Filters Standard kit | Document type: Product card | Created at: 25.10.2024 | Generated by: Systemair Online Catalogue | Language: English

Get In Touch

 **Call:** 0845 6880112
 **Email:** info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
 Settle, North Yorkshire, BD24 9RH





Dimensions and weights

Weight 61 kg

ERP

Energy class, Basic unit B

Energy class, Local demand A

ErP ready ErP 2018

Get In Touch

 **Call:** [0845 6880112](tel:08456880112)
 **Email:** info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH






Performance


Recommended low airflow is outside valid range

Recommended high airflow is outside valid range

Supply - Performance curve

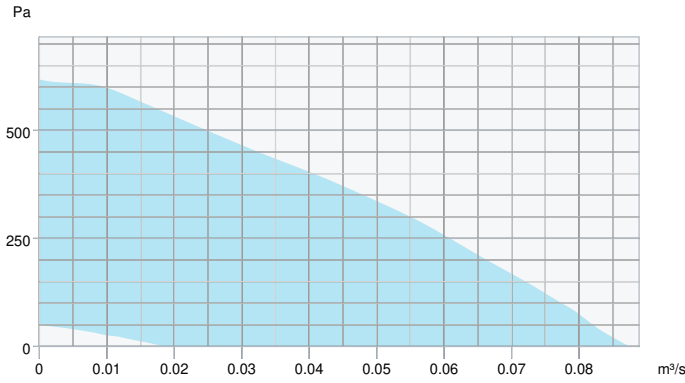

Extract - Performance curve

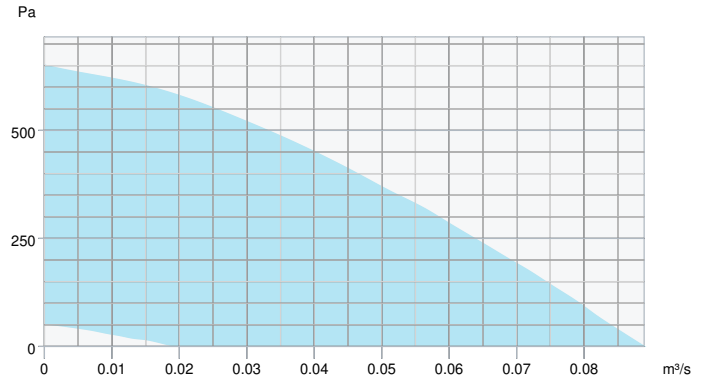

Unit	Supply	Extract
Air density	1.204 kg/m ³	
		Summer Winter
Supply air temperature		- -20.0 °C
Sound pressure level (reverberant field)	Total	

Get In Touch

Call: 0845 6880112
 Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard, Settle, North Yorkshire, BD24 9RH







Ecodesign

Product		
Trade name	Systemair	
Product name	SAVE VTR 150/K L 500W S.S	
Basic unit		
ErP compliance	2018	
SEC Average	-32.7	kWh/(m ² .a)
SEC Cold	-73.3	kWh/(m ² .a)
SEC Warm	-9.4	kWh/(m ² .a)
SEC Class	B	
Unit category	RVU	
Unit type	BVU	
Drive	Integrated VSD	
Heat recovery type	Regenerative	
Temperature ratio	76	%
qv max	278	m ³ /h
P max	178	W
Sound power (LWA)	43	dB(A)
qv ref	0.0542	m ³ /s
Ps ref	50	Pa
SPI	0.433	W/(m ³ /h)
CTRL	0.85	
MISC	1.1	
x-value	2	
External Leakage	3	%
Internal Leakage	Not applicable	
Carry over	4	%
Type of product	RAHU/AARE	
AEC average	392	kWh/a
AEC cold	392	kWh/a
AEC warm	392	kWh/a
AHS Average	4,251	kWh/a
AHS Cold	8,315	kWh/a
AHS Warm	1,922	kWh/a

Article name: SAVE VTR 150/K L 500W S.S | Product link: <https://shop.systemair.com/en-GB/productPermalink?p=609883> | Item Number: 488817 | Variant: Pleated Filters Standard kit | Document type: Product card | Created at: 25.10.2024 | Generated by: Systemair Online Catalogue | Language: English

Get In Touch

 **Call:** 0845 6880112
 **Email:** info@adremmit.co.uk

Our Address



Puravent, Adremmit Limited, Unit 5a, Commercial Yard,
 Settle, North Yorkshire, BD24 9RH





Units with local demand control		
ErP compliance		2018
SEC Average	-38.3	kWh/(m ² .a)
SEC Cold	-80.4	kWh/(m ² .a)
SEC Warm	-14.2	kWh/(m ² .a)
SEC Class		A
Unit category		RVU
Unit type		BVU
Drive		Integrated VSD
Heat recovery type		Regenerative
Temperature ratio	76	%
qv max	278	m ³ /h
P max	178	W
Sound power (LWA)	43	dB(A)
qv ref	0.0542	m ³ /s
Ps ref	50	Pa
SPI	0.433	W/(m ³ /h)
CTRL	0.65	
MISC	1.1	
x-value	2	
External Leakage	3	%
Internal Leakage		Not applicable
Carry over	4	%
Type of product		RAHU/AARE
AEC average	229	kWh/a
AEC cold	229	kWh/a
AEC warm	229	kWh/a
AHS Average	4,404	kWh/a
AHS Cold	8,614	kWh/a
AHS Warm	1,991	kWh/a

Get In Touch

 **Call:** 0845 6880112
 **Email:** info@adremit.co.uk



Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard, Settle, North Yorkshire, BD24 9RH





Dimension

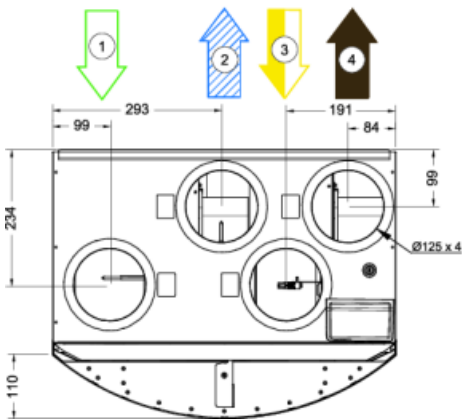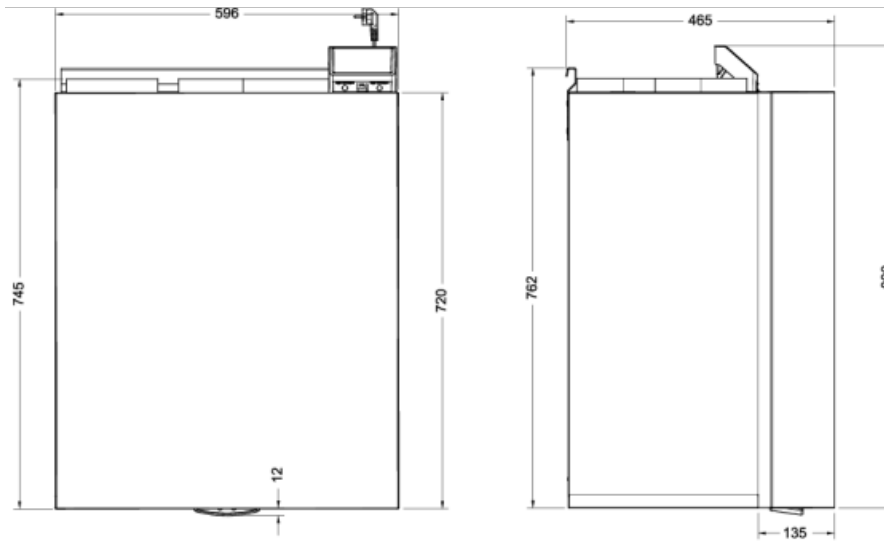

- 1 Outdoor air
- 2 Supply air
- 3 Extract air
- 4 Exhaust air

Get In Touch

Call: 0845 6880112
 Email: info@adremit.co.uk

Our Address


Puravent, Adremit Limited, Unit 5a, Commercial Yard,
 Settle, North Yorkshire, BD24 9RH






Energy class label

Energy class, Basic unit

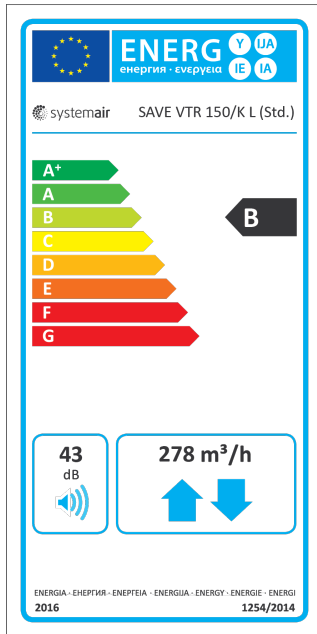

Energy class, Local demand

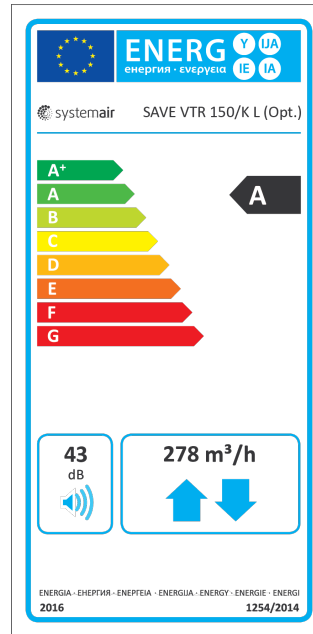

Get In Touch

Call: 0845 6880112
Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH







Accessories

- SAVE CONNECT 2.0 (399999)
- SAVE LIGHT White (319118)
- SAVE TOUCH White (138077)
- Duct cover SS VTR 150 (19567)
- Pressure guard with pitot tube (212987)
- RMK (153549)
- SAVE Wall Mounted Kit (140736)
- Systemair-E CO2 sensor (14904)
- VBC 125-3 Water heating batt (9839)
- CB 125-1,2 230V/1 Duct heater (5290)
- CEC Cable w/plug 12m (24782)
- CWK 125-3-2,5 Duct cooler,circ (30021)
- FK 125 Fast clamp (1608)
- LDC 125-900 Silencer (5191)
- VBC 125-2 Water heating batt (5457)
- CVVX 125 Combi grille, white (26422)
- RVAZ4 24A Actuator 0-10V (9862)
- TUNE-R-125-3-M1 (311938)
- TUNE-R-125-3-M4 (311968)
- USB-Nano-485 (282047)
- ZTR 15-0,6 valve 3-way (6573)
- ZTV 15-0,6 2-way valve (6571)
- SAVE LIGHT Black (319119)
- SAVE TOUCH Black (138078)
- CB heater connection kit 1 ~ (142852)
- Presence detector/IR24-P (6995)
- PSS20 Transformer 24V (202692)
- RMK-T (153548)
- Systemair-E CO2 RH Temperature (211522)
- VAV/CAV conversion kit (140777)
- CB 125-0,6 230V/1 Duct heater (5289)
- CB 125-1,8 230V/1 Duct heater (5377)
- CEC Cable w/plug 6m (24783)
- Duct sensor -30-70C (211524)
- LDC 125-600 Silencer (5190)
- Surface sensor -30-150C (211523)
- CVVX 125 Combi grille, black (26421)
- Room sensor 0-50C (211525)
- SPI-125 C Iris damper (6751)
- TUNE-R-125-3-M2 (311948)
- TUNE-R-125-3-M5 (311978)
- ZTR 15-0,4 valve 3-way (9670)
- ZTV 15-0,4 2-way valve (9829)

Documents

- Control panel installation quick guide
- Disassembly guide
- Energy label placement quick guide
- Installation manual
- Installation manual SAVE CONNECT 2.0
- Modbus variable list
- Service and Accessories installation manual
- User manual
- Eurovent Certification Diploma
- Commissioning record
- Technical fiche
- Schematic layout and description of components
- UK Declaration of Conformity
- Wiring diagram

Get In Touch

-  Call: [0845 6880112](tel:08456880112)
-  Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH