

EC75031 THERMOPLUS

Item no. 10036

Document type: **Product card**
 Document date: **2019-08-01**
 Generated by: **Systemair Online Catalogue**

Description


Slim radiant heater for protection against cold draughts.

Application

Thermoplus is mounted above windows and gives an efficient protection against cold draught. The slim shape also makes it suitable for heating areas with limited space, like for example bathrooms. Thermoplus can furthermore be a cost-effective and flexible alternative to floor heating.

Design

Thermoplus is covered with white enamel which makes it discreet and scratch-resistant. The slim shape makes it practically invisible when mounted in the ceiling angle.

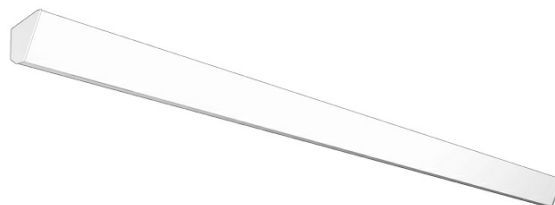

This product serie is affected by Ecodesign Regulation (EU) 2015/1188 for local space heaters. For more information please go to Start page.

Technical parameters

Unit	
Type of heating	Electric
Width	1810 mm
Height	100 mm
Depth	90 mm
Weight	4,4 kg
Max. installation height	3000 mm
Color casing	RAL 9010, NCS 0502-B
Ambient working temperature range (dry conditions)	-20-30 °C
Heater	
Supply voltage heating	400 V
Phase	2 ~
Electric heating 100%	0,75 kW
Current heating 100%	1,9 A
Max. element temperature	180 °C

Accessories


Electric accessories


- [TEP44 Cover \(205540\)](#)
- [SKG30 Blacksensör \(205550\)](#)
- [TAP16R Electronic thermostat \(92790\)](#)
- [RB3 Relay Box \(93012\)](#)
- [RTX54 Room temp sensor \(93044\)](#)


Accessories


[TF1 Roof hold \(10114\)](#)

Documentation

 [ma_frico_thermoplus_gb_160518.pdf](#) (182,95kB)

 [ma_frico_thermoplus_gb_181116.pdf](#) (1,10MB)

 [cat_frico_thermoplus_gb_180607.pdf](#) (605,41kB)

 [DoC Radiant Heaters_gb_160225.pdf](#) (221,88kB)

 [Environmental facts Thermoplus.pdf](#) (43,45kB)