

F251-16-50 COOKERHOOD TRANSF

Item no. 5930

Document type: **Product card**Document date: **2019-08-01**

Generated by: Systemair Online Catalogue

Description

- Provides good lighting
- Easy to clean
- · Available in 3 widths

The Systemair kitchen extract hood provides an elegant and easily adaptable ventilation system for your kitchen. The high capacity hood has a rigid area with a front screen of hardened sheet glass. The hood provides excellent light for kitchen work and is fitted with a wire mesh filter that is easy to clean. This filter should be cleaned at least once a month, either by hand or in the dishwasher. Simple connections with our flexible ducting.



The F 251-16 hood is fitted with a transformer with a three-speed fan control, grease filter, light and damper. The hood is supplied with an already-fitted quick-coupling device for installation with the kitchen shelf fans.

The versions -50, -60 and -70 indicates the width of the hood.

-60 is available in stainless steel finish.


Technical parameters


Other		
Weight	7,7	kg
Default group		
Voltage	230	V
Frequency	50	Hz
Phase	1	~
Input power (P1)	300	W
Material in filter	Knitted alu. carpet	


Name: F251-16-50 COOKERHOOD TRANSF | Item no.: 5930

Document type: Product card | Document date: 2019-08-01 | Generated by: Online catalogue

Dimensions

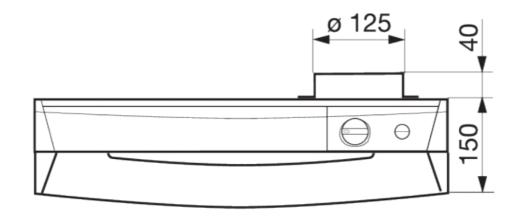

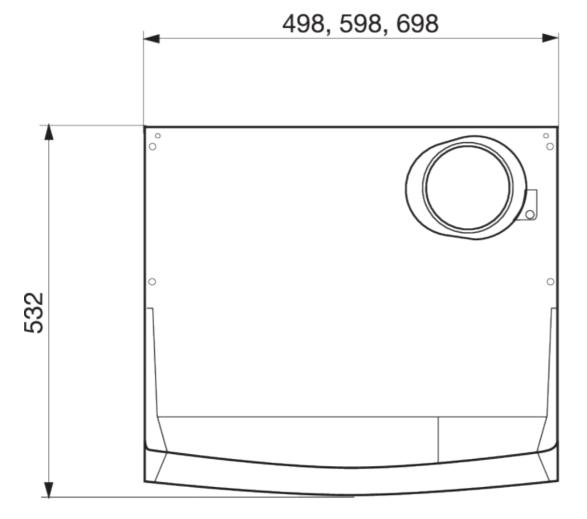

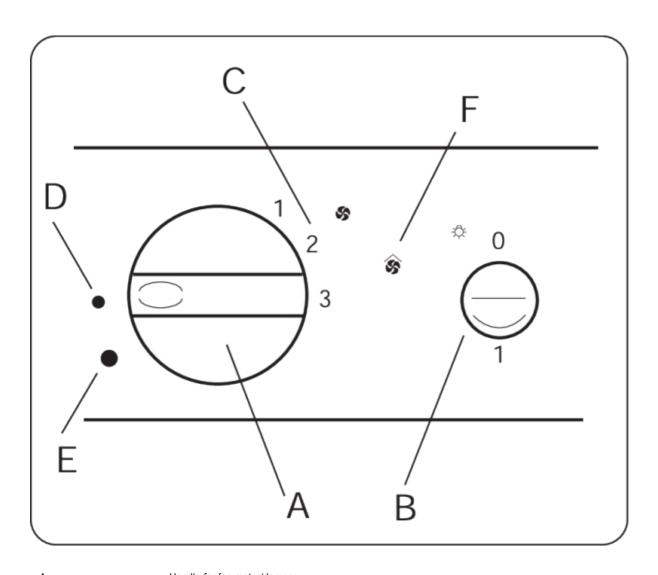

Α	Handle for fan motor/damper
В	Button for lighting
С	Fan speed, three steps
D	General house ventilation.low speed
Е	General house ventilation, force speed
F	Indecator lamp for general house ventilation, force speed

Accessories


Documentation



F 251-16 IMO 122648.pdf (312,11kB)

Diagram

Setting Forced flow

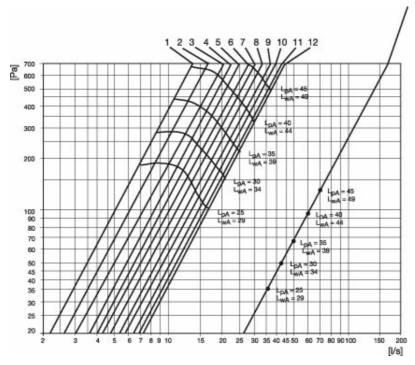

Specification text

.