

F251-16-60 COOKERHOOD TRANSF

Item no. 5931

Document type: **Product card**
 Document date: **2019-08-01**
 Generated by: **Systemair Online Catalogue**

Description

- Provides good lighting
- Easy to clean
- Available in 3 widths

The Systemair kitchen extract hood provides an elegant and easily adaptable ventilation system for your kitchen. The high capacity hood has a rigid area with a front screen of hardened sheet glass. The hood provides excellent light for kitchen work and is fitted with a wire mesh filter that is easy to clean. This filter should be cleaned at least once a month, either by hand or in the dishwasher. Simple connections with our flexible ducting.



The F 251-16 hood is fitted with a transformer with a three-speed fan control, grease filter, light and damper. The hood is supplied with an already-fitted quick-coupling device for installation with the kitchen shelf fans.

The versions -50, -60 and -70 indicates the width of the hood.



-60 is available in stainless steel finish.


Technical parameters

| Other | |
|--------------------|---------------------|
| Weight | 8,55 kg |
| Default group | |
| Voltage | 230 V |
| Frequency | 50 Hz |
| Phase | 1 ~ |
| Input power (P1) | 300 W |
| Material in filter | Knitted alu. carpet |

Dimensions


- A Handle for fan motor/damper
- B Button for lighting
- C Fan speed, three steps
- D General house ventilation.low speed
- E General house ventilation, force speed
- F Indecator lamp for general house ventilation, force speed

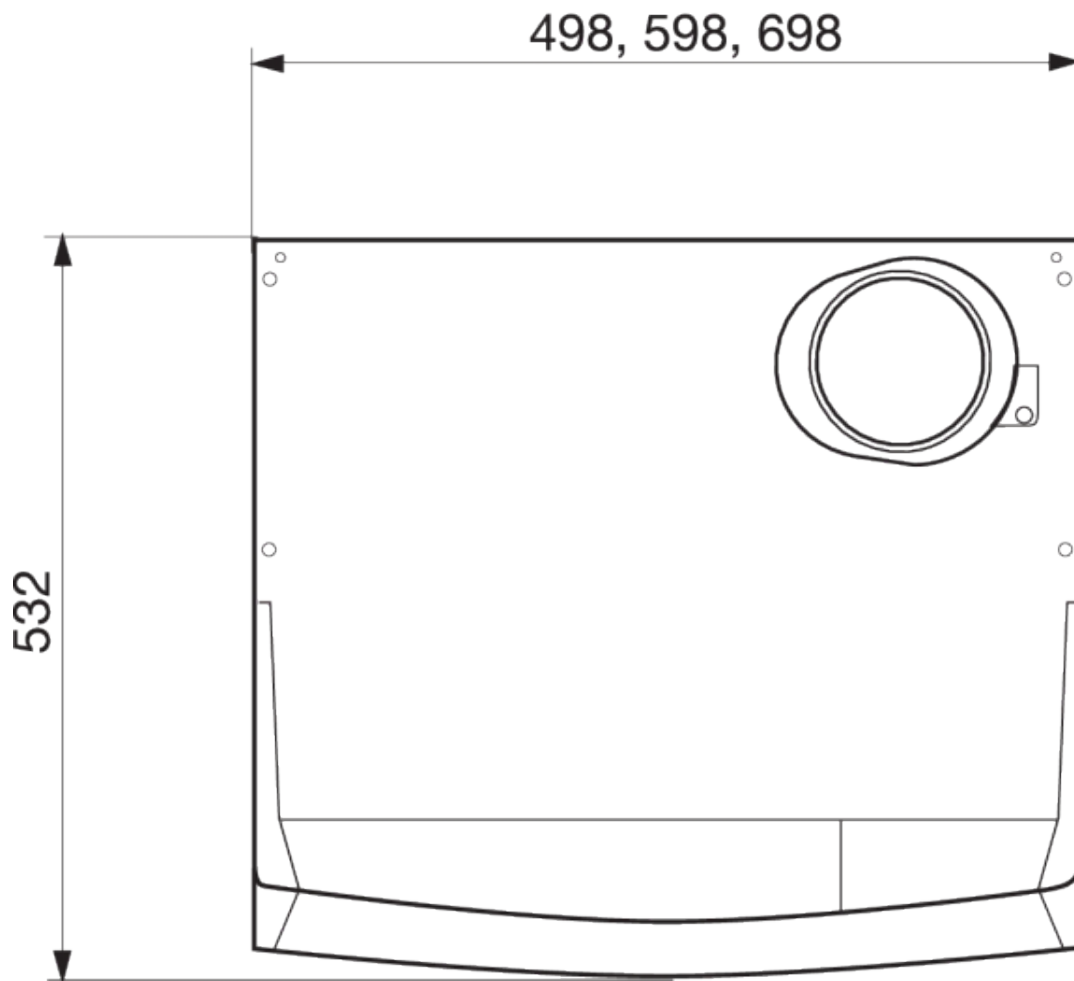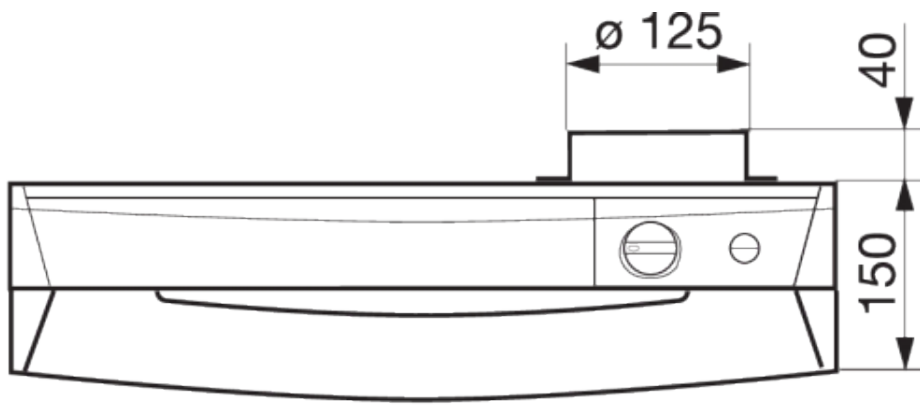

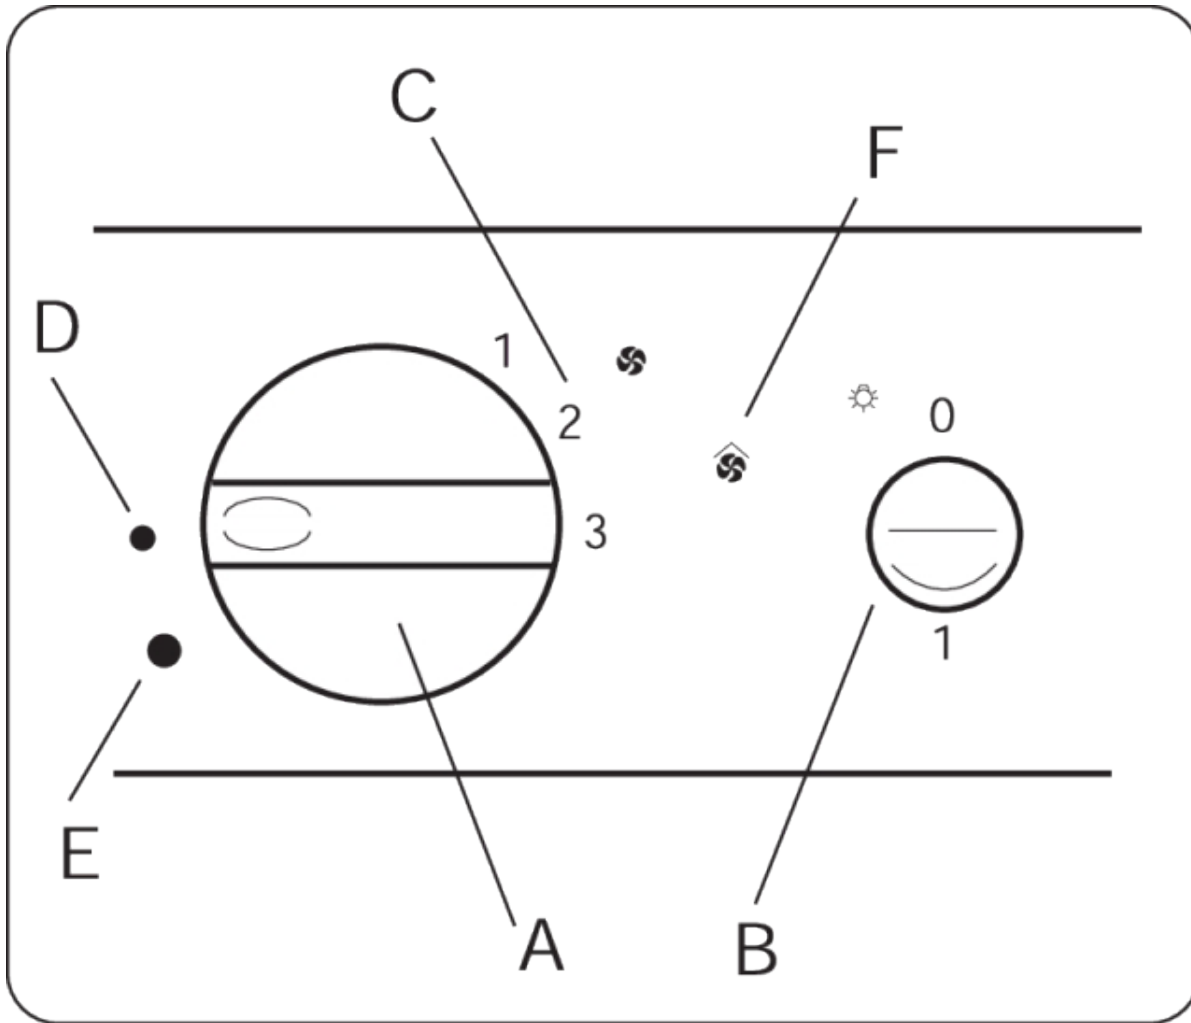

Accessories


Documentation

 F 251-16 IMO 122648.pdf (312,11kB)

 F 251-16 WD.pdf (1,96MB)

Diagram

Setting Forced flow

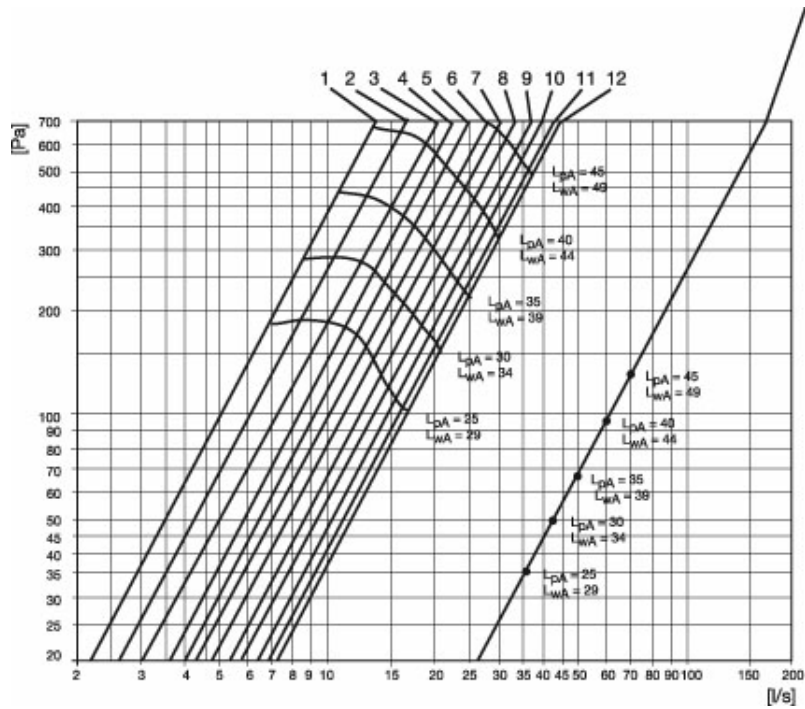

Specification text