

KV 150 M SILEO

Item no. 25370

Version: 50 Hz

Document type: **Product card**
 Document date: **2019-07-10**
 Generated by: **Systemair Online Catalogue**




Description

- Speed-controllable
- Quiet-running
- Increased efficiency
- Integral thermal contacts
- Can be installed in any position - duct or wall mounted
- Can be installed outdoors
- Maintenance-free and reliable

The KV sileo series is designed for installation in ducts. All KV-fans have minimum 25 mm long spigot connections. The FK mounting clamp facilitates easy installation and removal, and prevents the transfer of vibration to the duct. The fans have backward-curved blades and external rotor motors. KV sileo fans can be speed-controlled via a stepless thyristor or a 5-step transformer.

To protect the motor from overheating the fan has integral thermal contacts with manual reset.

The casing is manufactured from galvanised sheet steel and folded which gives the fan a close to air tight casing, wet room applications of the fan are possible due to the air tight casing.

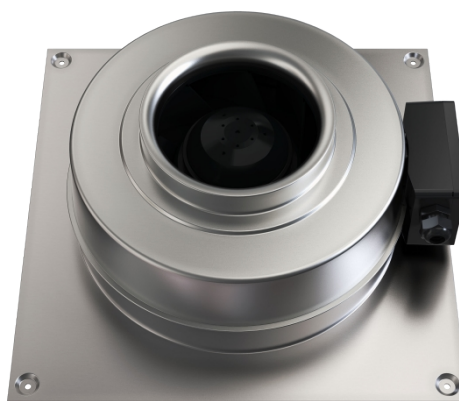


Technical parameters

Nominal data		
Voltage	230	V
Frequency	50	Hz
Phase	1	~
Input power (P1)	52,5	W
Current	0,229	A
Max. airflow	0,132	m ³ /s
R.p.m.	2373	r.p.m.
Capacitor	1,5	µF
Weight	3,1	kg
Temperature data		
Max. temperature of transported air	70	°C
Max. temperature of transported air when speed-controlled	70	°C
Sound data		
Sound pressure level at 3 m	42,2	dB(A)


Protection / Classification	
Insulation class	B
Enclosure class, motor	IP44
ErP	
Energy class, basic unit	E
Energy class, basic unit option	B
ErP ready	ErP 2016/ErP 2018

Energy class label

Energy class, basic unit


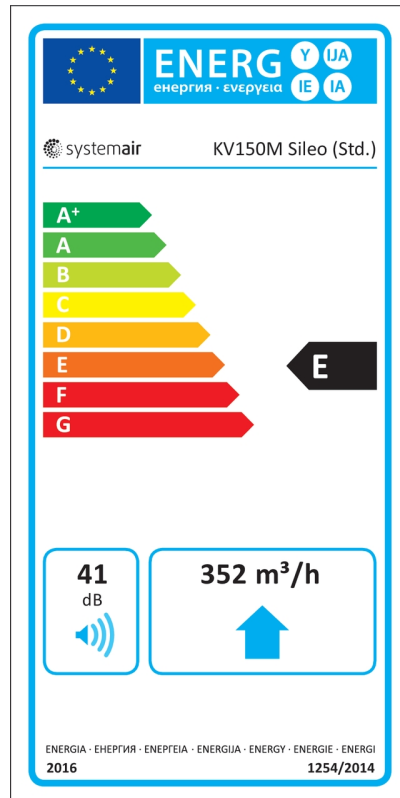


Energy class, unit with local demand control

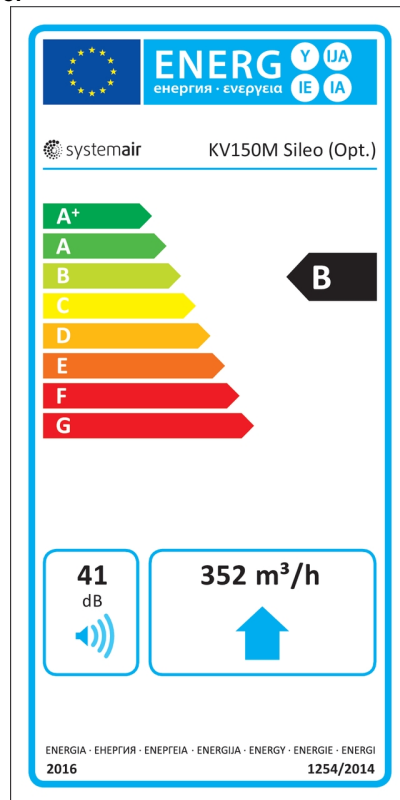

Diagrams



Diagrams

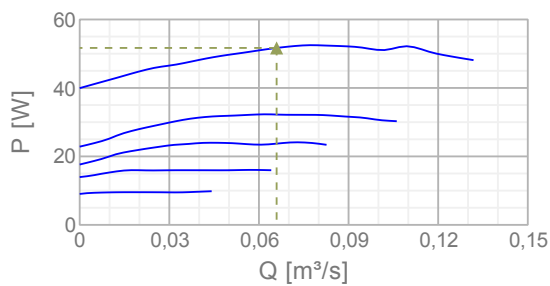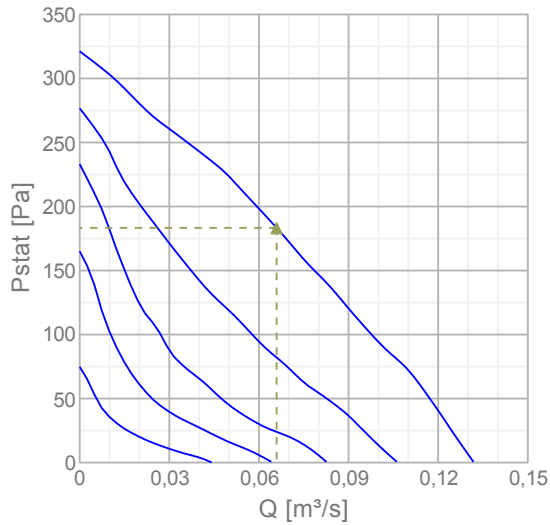

Max efficiency


Hydraulic data										
▲ Working air flow										0,0659 m ³ /s
▲ Working static pressure										183 Pa
▲ Power										51,7 W
Speed										2389 r.p.m.
Current										0,226 A
SFP										0,784 W/(l/s)
Voltage										230 V
Sound power level		63	125	250	500	1k	2k	4k	8k	Tot
Inlet	dB(A)	44	49	57	53	57	57	55	42	63
Outlet	dB(A)	25	33	52	59	66	62	62	49	69
Surrounding	dB(A)	20	26	28	39	43	45	44	30	49

Dimensions

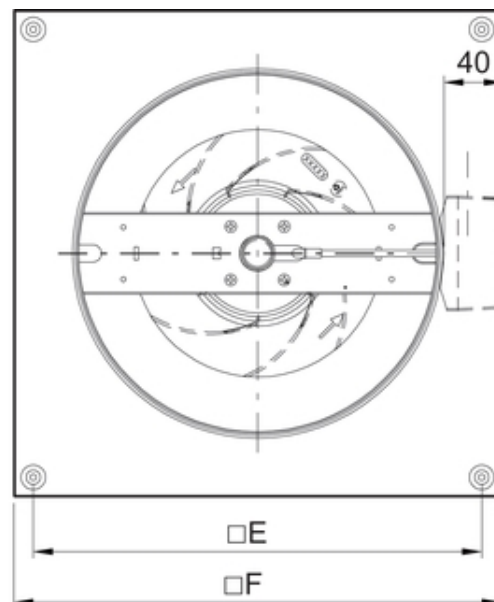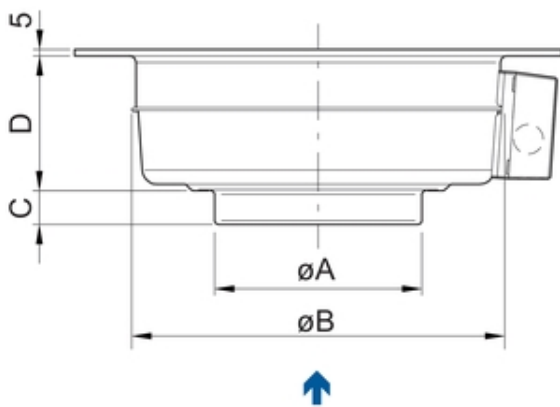

	ØA	ØB	C	D	□E	□F
KV 150 M	149	286	25	113	344	374
KV 150 XL	149	336	29	147	394	425

230V 1~

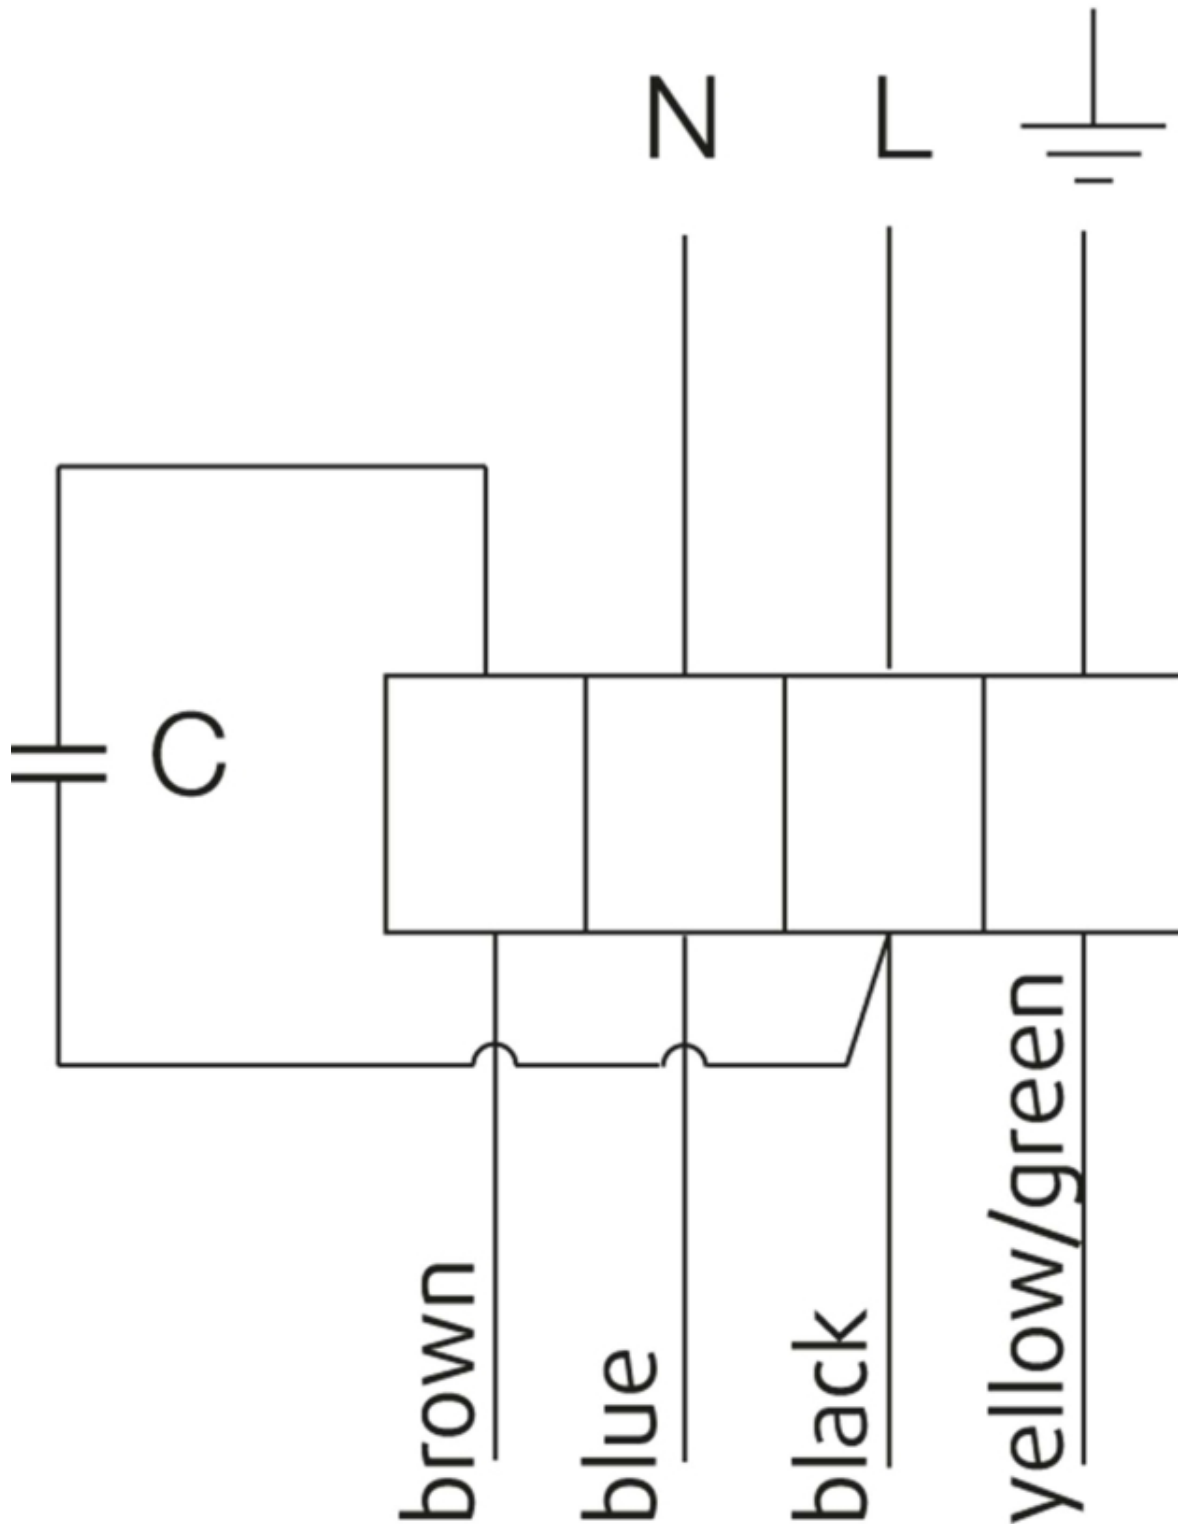

U1 = blue = blau
U2 = black = schwarz
Z = brown = braun
PE = yellow/green = grün-gelb

Accessories


Electric accessories

[RE 1.5 Speed control \(5000\)](#)
[REU 1.5 Speed control \(5004\)](#)
[REE 1 Speed control \(5314\)](#)
[REPT 6 Digital regulator \(5698\)](#)
[RT 0-30 Room Thermostat \(5151\)](#)
[CO2RT-R-D Transmitter \(6993\)](#)
[DTV200 \(6261\)](#)
[STL 1.5 Speed controller \(84251\)](#)
[REV-3POL/03 ON/OFF \(33978\)](#)
[DTV500A \(96807\)](#)

Accessories

[CB 150-1,2 230V/1 Duct heater \(5378\)](#)
[CB 150-2,1 230V/1 Duct heater \(5379\)](#)
[CB 150-2,7 230V/1 Duct heater \(5380\)](#)
[CBM 150-2,1 230V/1 Duct heater \(5481\)](#)
[LDC 150-600 Silencer \(5199\)](#)
[FFR 150 Filter cassette \(1769\)](#)
[FK 150 Fast clamp \(1609\)](#)
[SG 150 Protection guard \(5555\)](#)
[RSK-150 Back draft damper \(5599\)](#)
[LDC 150-300 Silencer \(53723\)](#)
[CB 150-5,0 400V/2 Duct heater \(5381\)](#)

Documentation

 [202341_Fans_Instructions_CE_A010.pdf \(1,83MB\)](#)

Specification text

KV 150M TW Circular duct fan
DN150, 230V50Hz, 1~, imp. backw. curved

Circular duct fan for wall mounting, easy and direct installation in ducts.
Galvanized sheet steel housing.
Circular connection spigot, length 25mm, acc. to EN1506:1997

Free-running, backward curved centrifugal impeller made of plastic.
Balancing made to G 6.3, motor compl. with impeller statically and dynamically balanced in two planes acc. to DIN ISO 1940 T.1.

Voltage controllable external rotor motor, maintenance-free, the motor is placed inside the air flow for cooling. Integral thermal contacts with manual reset acc. to EN 60335-2-80, speed-controlled via a 5-step transformer or a stepless thyristor. Silent, long-life ball bearings. Terminal box (IP55) on the casing.

Mounting brackets included in delivery.

For indoor, outdoor installation as well as in wet areas.
Air leakage class C acc. to EN 12237:2003.
Installation in any mounting position.

PRODUCT: SYSTEMAIR
TYPE: KV 150M TW
Item no. 1211