

# SSGE/F 315-355 SOCKET SILENCER

Item no. 95087

Document type: **Product card**  
 Document date: **2019-06-20**  
 Generated by: **Systemair Online Catalogue**

## Description

### Socket silencer for DVG and DVV-XS...XP/F400 and F600


The socket silencers SSGE/F are suitable for pitched roof constructions up to a max. angle of 30° at size 315-630 and max. 20° at size 800 (specified angle above 20° upon inquiry). The angle of supports and height above roof can be adjusted on the socket - 3 positions H1-H3 to fasten and rotate the supports. At size 800 this is limited. Casing is manufactured from aluzinc/magnelis steel sheet, sides filled with insulation of mineral wool with a textile lining. Insulation is secured with an additional metallic guard. Suitable for up to 600°C/2h. The surface of insulation is abrasion resistant. Supplied with a sealing between the socket and the fan.



## Technical parameters

Other	
Weight	50 kg

## Dimensions

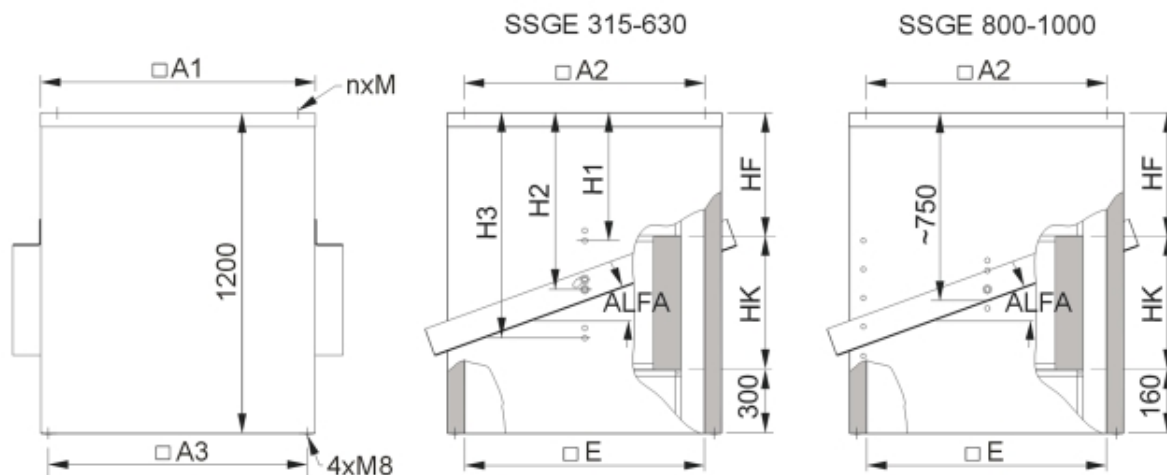


## Accessories

## Documentation

IMO\_FDGE\_SSGE\_26\_05\_2016.pdf (1,58MB)

SSGE\_F\_315\_355\_00.dxf (1,59MB)

## Diagram

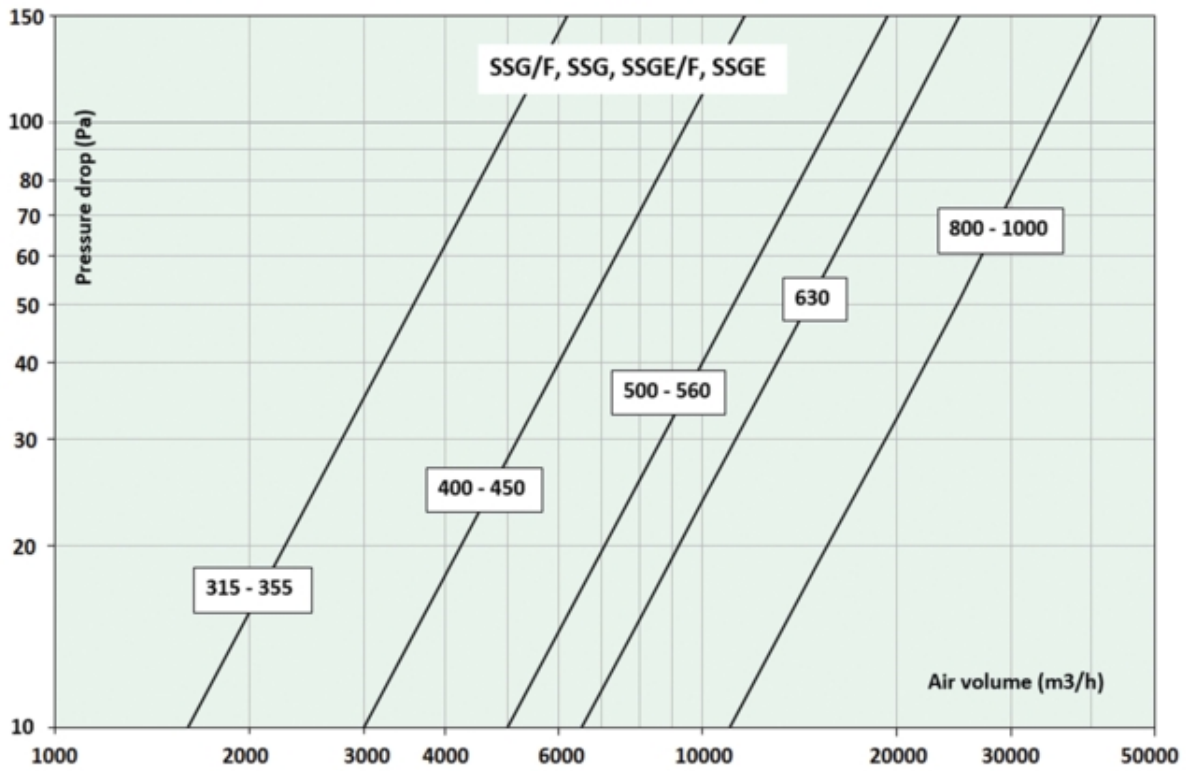

Mid-frequency (Hz)	125	250	500	1k	2k	4k	8k
Attenuation (dB)	4	8	11	18	17	15	11