

TFF 150 SUPPL VALVE RAL9010

Item no. 7509

Document type: **Product card**
Document date: **2019-06-11**
Generated by: **Systemair Online Catalogue**

Description

Air deflector for screening of direction up to 180 degree.

The Systemair TFF circular supply diffuser. This diffuser has a shielding device for producing a directional (180°) distribution pattern and has an adjustable gap.

Function

The TFF is a circular supply diffuser for ceiling installation. The TFF consists of an inlet cone and diffuser unit containing sound-absorbent material. The technical specifications of the diffuser unit give it a wide range of applications. By rotating diffuser unit, the throw and pressure drop can be adjusted steplessly. Both concentric and eccentric distribution patterns can be selected by using the shielding device provided.

Design

The TFF is manufactured from sheet steel with a white powder-coated finish (RAL 9010-80) and is available in the following diameters: \varnothing 80, \varnothing 100, \varnothing 125, \varnothing 150, \varnothing 160 and \varnothing 200.

How to use for exhaust air

This device can be used for exhaust air.

Mounting

The TFF is easily fitted, either into the mounting frame or directly onto the duct using its friction springs. If the TFF is fitted to a PER plenum box, there must be a straight length, 4 times the duct's diameter, in front of the PER plenum box.

Technical details can be found [here](#)


Technical parameters

Other

Weight

0,4 kg

Dimensions

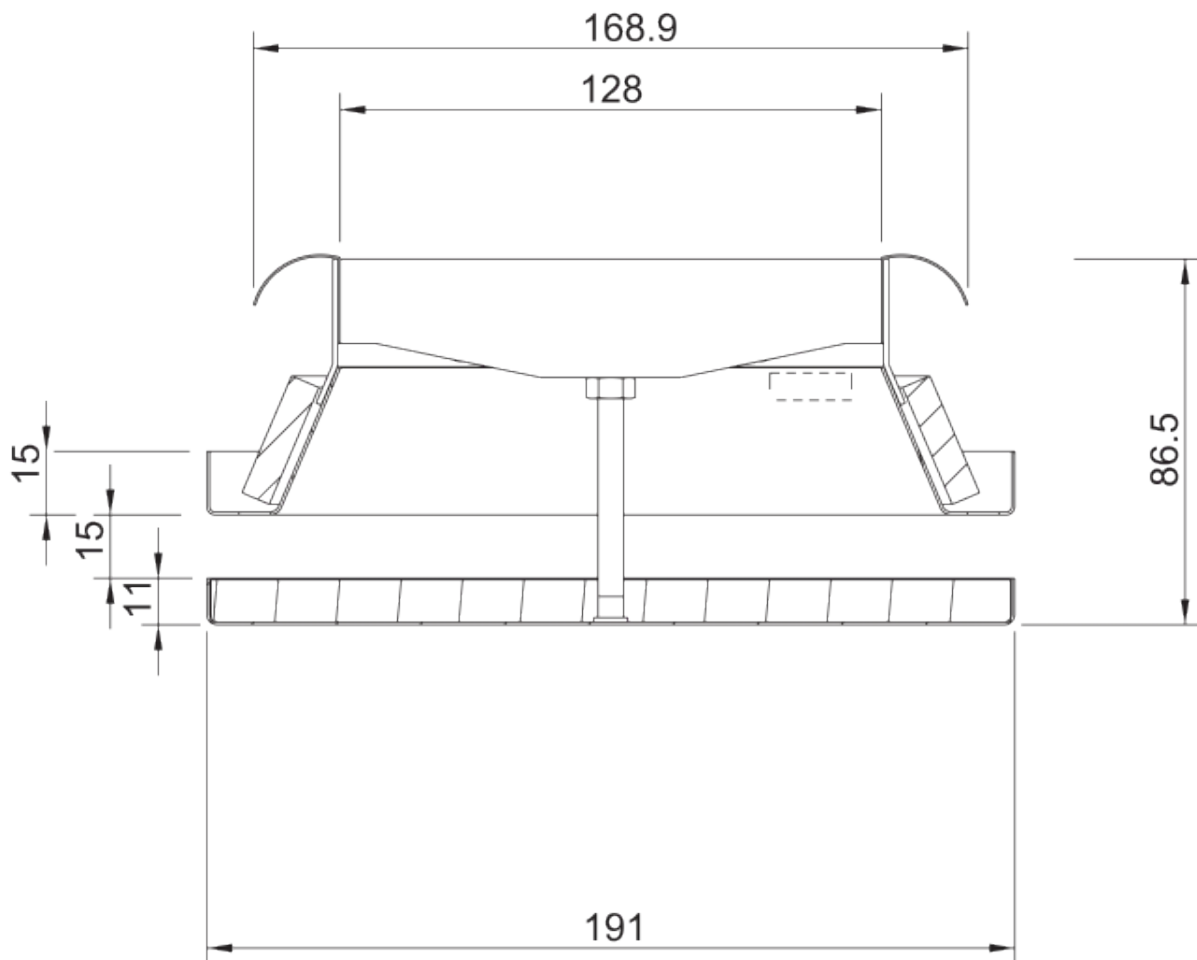

Accessories


Accessories

[RFU-150 Mounting Frame \(6132\)](#)

Documentation

 [TFF IMO GB.pdf \(135,56kB\)](#)

Diagram

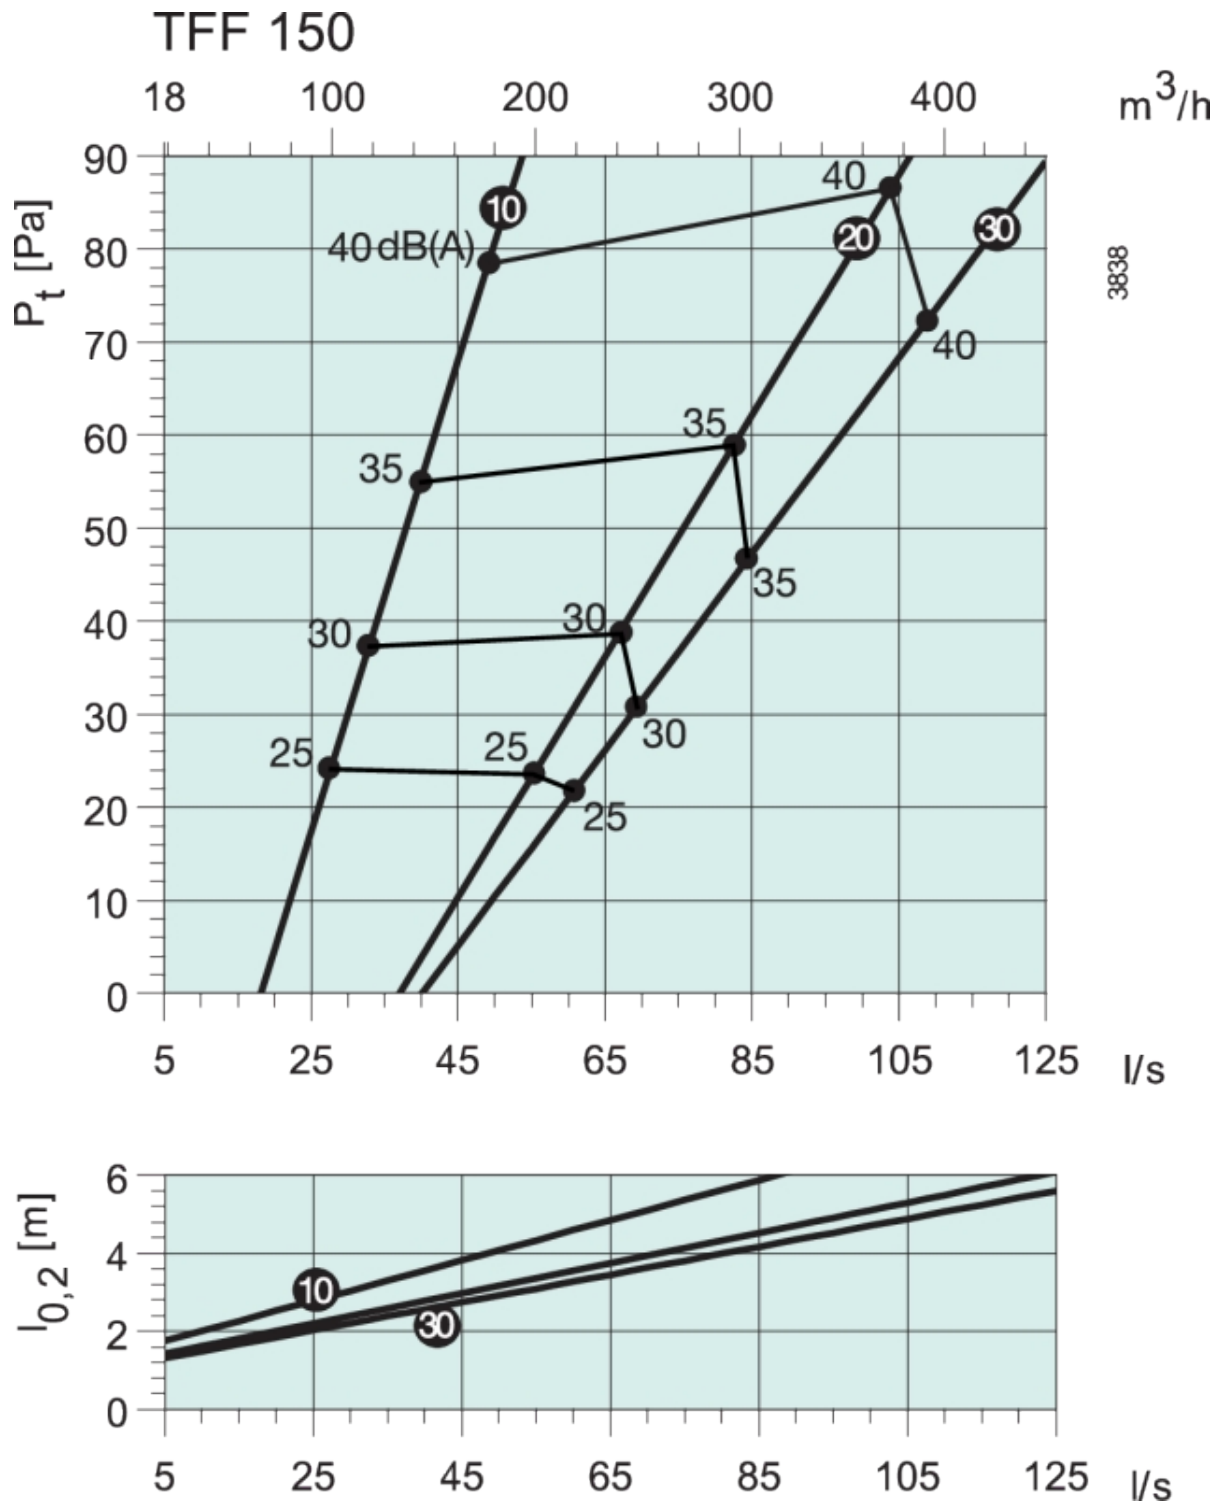

The diagram shows
 Air volume (l/s and m^3/h), total pressure (Pa), throw ($l_{0,2}$),
 and sound pressure level [dB(A)] for air gaps measuring 10,
 20, and 30 mm. There is a 15 mm air gap when the unit is
 shielded 180°, but the data for a 10 mm air gap still apply.
 The throw value, however, should be multiplied by 1.2.

Diagrams for TFF + PER is shown for TFF with an air gap
 of 30 mm.

Sound attenuation, ΔL (dB)

	Mid-frequency band, Hz							
	63	125	250	500	1k	2k	4k	8k
TFF 080	24	19	15	11	2	3	6	7
TFF 100	22	17	13	10	2	2	7	8
TFF 125	18	16	12	8	3	3	7	8
TFF 150	18	15	11	9	4	5	7	9
TFF 160	18	15	11	9	4	5	7	9
TFF 200	16	13	9	7	5	5	8	8
TFF 125 + THOR	22	17	13	16	8	9	11	13
TFF 160 + THOR	20	17	12	15	9	11	12	13
TFF 200 + THOR	19	16	12	16	11	12	11	12

Sound power level, L_w

$L_w(\text{dB}) = L_{pA} + K_{ok}$ (L_{pA} = diagram K_{ok} = table)

correction factor K_{ok}

	63	125	250	500	1k	2k	4k	8k
TFF 080	16	9	6	0	-3	-11	-16	-20
TFF 100	19	8	6	1	-7	-15	-19	-21
TFF 125	24	10	4	-2	-8	-15	-20	-19
TFF 150	23	11	5	-2	-9	-14	-18	-23
TFF 160	23	11	5	-2	-9	-14	-18	-23
TFF 200	19	9	8	0	-7	-13	-17	-21
TFF 125 + THOR	14	8	9	-1	-5	-11	-15	-17
TFF 160 + THOR	15	7	10	-1	-7	-15	-18	-21
TFF 200 + THOR	18	8	7	-1	-4	-11	-13	-15
Tolerance	±6	±5	±2	±2	±2	±2	±2	±3

Specification text