

## Datasheet

# ACB-07-H



Adiabatic module with side air outlet



	DESCRIPTION	UNITS	DATA
AIRFLOW	Maximum allowable flow	m <sup>3</sup> /h	6.480
	Minimum allowable flow	m <sup>3</sup> /h	4.320
	Pressure loss at maximum flow	Well	40
	Pressure loss at minimum flow	Well	18
THE PIPE	Model	-	EBM ALPHA 45/15
	Rated power/consumption	-	50 W / 0.17 A
	Caudal (2m altura)	l/m	25
	Strain	V/Phases/Hz	230/1/50
	Level switch	-	Optional
COOLING	Panel type	-	5090
	Dimensions	Mm	670x600x100
	Amount	Units	3
	Total panel surface	m <sup>2</sup>	1,20
	Panel air speed (Max/Min Flow)	m/s	1,50 / 1,00 m/s
	Panel efficiency	%	88% (1,5 m/s) – 90% (1,0 m/s)
	Delivery temperature (40°C – 30% HR)	°C	26,9°C (1,5 m/s) – 26,6°C (1,0 m/s)
	Prefilter G4	-	Optional
CONNECTIONS	Inlet solenoid valve	Inches	½"
	Water evacuation	Inches	1 ¼"
	Overflow	Inches	1"
SYSTEM CLEANING	Automatic emptying	-	AND
	Uv lamp	-	Optional
DIMENSIONS	Overall dimensions	Long wide high	825x855x1095mm
	Connection mouth dimensions	Length Width	400x345mm
	Empty/operating weight	Kg	71 / 81
CERTIFICATES			THIS

METALURGICA MANLLEUENSE, SA y Tel. +34 93 851 15 99 y [www.metmann.com](http://www.metmann.com)  
 C/Fontcuberta, 32-36 y 08560-Manlleu (Barcelona) SPAIN

## Get In Touch

 Call: 0845 6880112  
 Email: [info@adremit.co.uk](mailto:info@adremit.co.uk)

## Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,  
 Settle, North Yorkshire, BD24 9RH

## Datasheet

# ACB-07-H

Adiabatic module with side air outlet



## Standard construction details

- Water tray made of polyamide • Corner and central posts in stainless steel AISI-304 • Upper roof made of polyamide • Intake grilles in galvanized steel with polyester powder paint (INOX version in AISI-304) • Type 5090 cooling panels 100mm thick • Automatic emptying system patented by MET MANN • EBM ALPHA 45/15 water pump with external rotor motor • Normally closed inlet solenoid valve
- Half-turn opening system to access the interior of the equipment • Base bench with legs supplied as standard to facilitate transportation and installation

## Custom manufacturing

- Air filtering to comply with BRC food regulations

METALURGICA MANLLEUENSE, SA y Tel. +34 93 851 15 99 y [www.metmann.com](http://www.metmann.com)  
C/Fontcuberta, 32-36 y 08560-Manlleu (Barcelona) SPAIN

### Get In Touch

 Call: [0845 6880112](tel:08456880112)  
 Email: [info@adremit.co.uk](mailto:info@adremit.co.uk)

### Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,  
Settle, North Yorkshire, BD24 9RH


## Datasheet

# ACB-07-H

Adiabatic module with side air outlet



## Overall dimensions

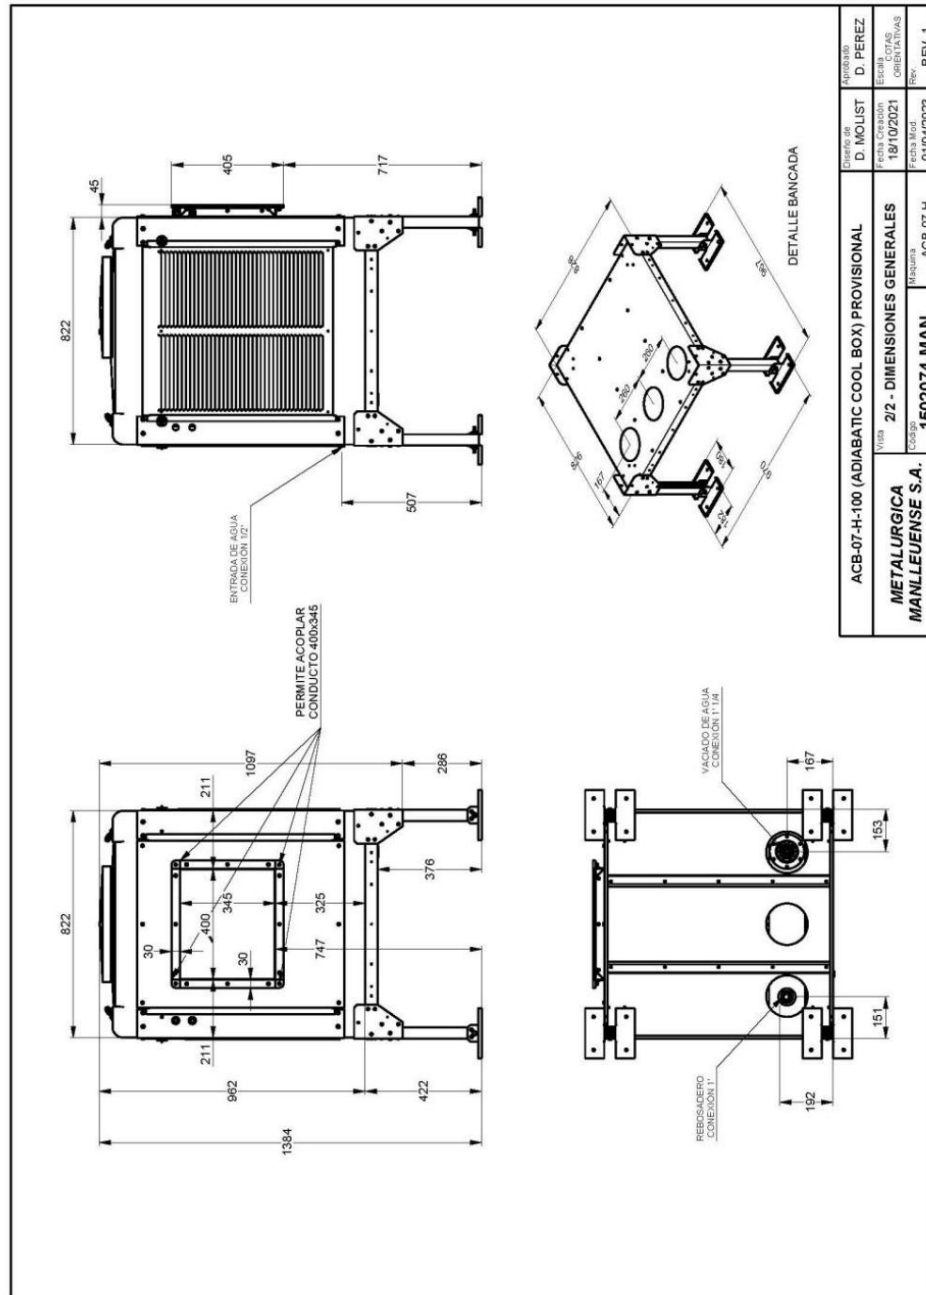

METALURGICA MANLLEUENSE, SA y Tel. +34 93 851 15 99 y [www.metmann.com](http://www.metmann.com)  
 C/Fontcuberta, 32-36 y 08560-Manlleu (Barcelona) SPAIN

### Get In Touch

 Call: [0845 6880112](tel:08456880112)  
 Email: [info@adremit.co.uk](mailto:info@adremit.co.uk)

### Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,  
 Settle, North Yorkshire, BD24 9RH


## Datasheet

# ACB-07-H

Adiabatic module with side air outlet



## Installation in paint booth to increase humidity

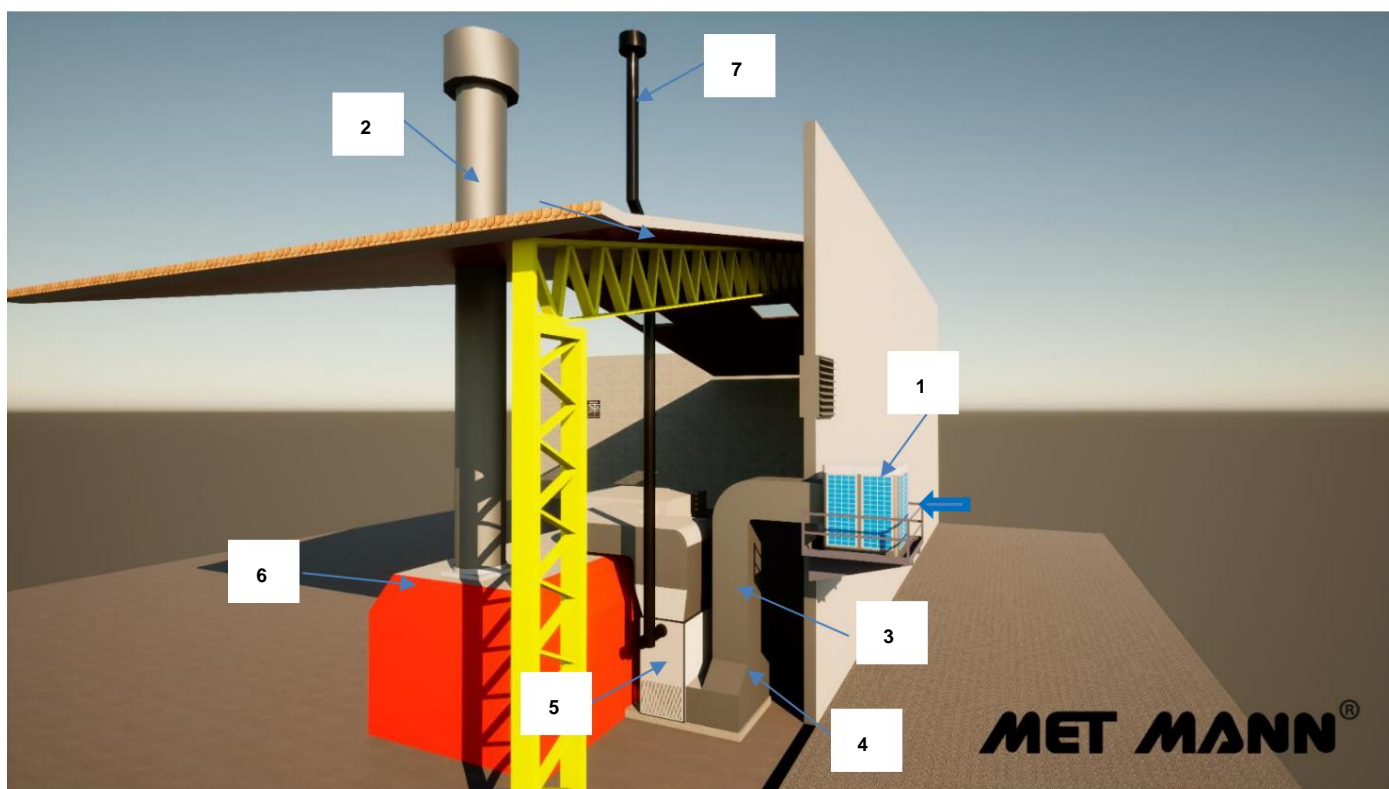

POSITION	DESCRIPTION
01	ACB adiabatic module
02	Air extraction duct
03	treated air duct
04	Drawer with air filters
05	hot air generator
06	Pressurized paint booth
07	Flue gas extraction chimney

METALURGICA MANLLEUENSE, SA y Tel. +34 93 851 15 99 y [www.metmann.com](http://www.metmann.com)  
 C/Fontcuberta, 32-36 y 08560-Manlleu (Barcelona) SPAIN

### Get In Touch

 Call: 0845 6880112  
 Email: [info@adremit.co.uk](mailto:info@adremit.co.uk)

### Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,  
 Settle, North Yorkshire, BD24 9RH