

TG 740-1200 ROOF CURB

Item no. 5088

Document type: **Product card**

Document date: **2019-06-05**

Generated by: **Systemair Online Catalogue**

Description

Roof curb

The brackets make it easy to fit the roof curb to the roof pitch, and also function as a silencer. Manufactured from galvanised sheet steel and insulated with a 50 mm rockwool sheet and a perforated inner plate.

The roof curb is fitted with plastic piping and conduits for electric cables.

A roof curb with 100 mm insulation (corresponding to A60 insulation) is available on request.



Technical parameters

Weight

62,5 kg

Accessories


Accessories

[BTG 740 Back Draft Damper \(5095\)](#)

Dimensions

	A	B	C	D	E
TG 740-1200	1200	694	578	655	590
TG 940-1200	1200	894	778	840	750

Hole measurement in roof = B+10 mm

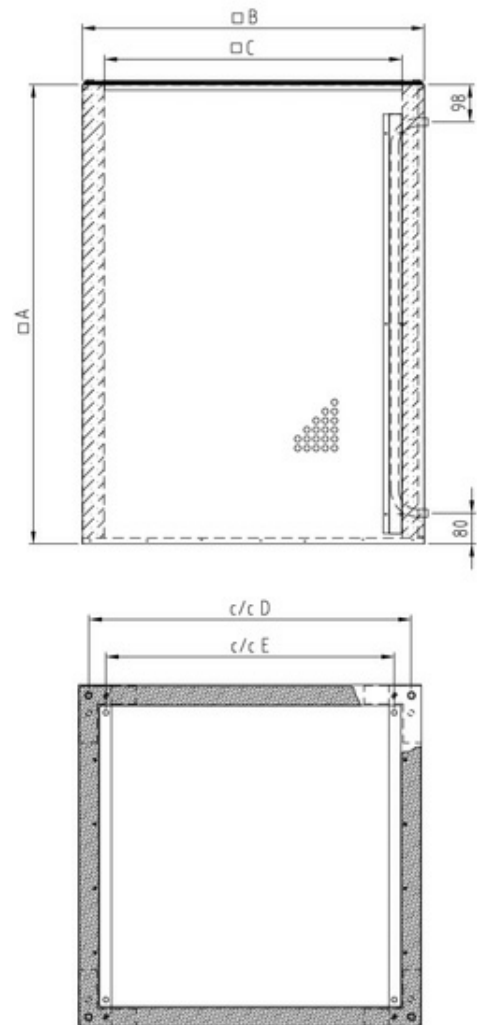

Acoustics

TG	Hz	Δ LA	63	125	250	500	1k	2k	4k	8k
300 - 800	dB	10	0	3	7	15	26	15	6	2
400 - 800	dB	9	1	3	7	13	19	10	3	2
540-800	dB	8	0	3	6	9	12	8	5	5
540-1230	dB	10	0	6	6	14	17	12	6	5
640-800	dB	5	1	2	4	7	8	6	4	4
640-1230	dB	8	0	4	4	12	15	8	5	5
740-1230	dB	7	0	3	4	10	13	7	4	4
940-1200	dB	6	0	3	4	8	9	6	4	4

Specification text